



200 Series Lug & Ring Terminal Caps

Part Dimensions / Ordering Information

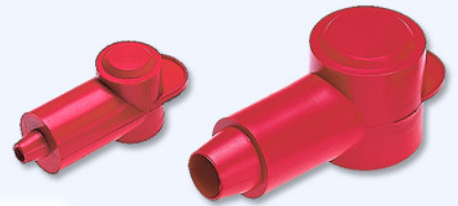

Dimensions

Base Part Number	A Terminal O.D. (in/mm)	B Post Height (in/mm)	C Ins. Grip Diameter (in/mm)	D Cable Entry Options (See Chart)	E Terminal Length (in/mm)	Nominal Material Thickness (in/mm)
212N	.48 / 12	.70 / 17.8	.5 / 12.7	1, 2	1.0 / 25.4	.06 / 1.5
212E	.48 / 12	.70 / 17.8	.5 / 12.7	1, 2	1.25 / 31.8	.06 / 1.5
214N	.55 / 14	.75 / 19.1	.5 / 12.7	1, 2	1.0 / 25.4	.06 / 1.5
214E	.55 / 14	.75 / 19.1	.5 / 12.7	1, 2	1.25 / 31.8	.06 / 1.5
216N	.65 / 16	.80 / 20.3	.5 / 12.7	1, 2	1.0 / 25.4	.06 / 1.5
216E	.65 / 16	.80 / 20.3	.5 / 12.7	1, 2	1.25 / 31.8	.06 / 1.5
218N	.73 / 18	.87 / 22.1	.5 / 12.7	1, 2	1.0 / 25.4	.06 / 1.5
218E	.73 / 18	.87 / 22.1	.5 / 12.7	1, 2	1.25 / 31.8	.06 / 1.5
220N	.81 / 20	.95 / 24.1	.7 / 17.8	1, 2, 3	1.32 / 33.5	.07 / 1.8
220E	.81 / 20	.95 / 24.1	.7 / 17.8	1, 2, 3	1.75 / 44.5	.07 / 1.8
222N	.87 / 22	1.05 / 26.7	.7 / 17.8	1, 2, 3	1.32 / 33.5	.07 / 1.8
222E	.87 / 22	1.05 / 26.7	.7 / 17.8	1, 2, 3	1.75 / 44.5	.07 / 1.8
224N	.95 / 24	1.13 / 28.7	.7 / 17.8	1, 2, 3	1.62 / 41.2	.08 / 2.0
224E	.95 / 24	1.13 / 28.7	.7 / 17.8	1, 2, 3	2.06 / 52.3	.08 / 2.0
226N	1.03 / 26	1.25 / 31.8	.7 / 17.8	1, 2, 3	1.62 / 41.2	.08 / 2.0
226E	1.03 / 26	1.25 / 31.8	.7 / 17.8	1, 2, 3	2.06 / 52.3	.08 / 2.0
228N	1.11 / 28	1.32 / 33.5	.75 / 19.1	1, 2, 3	1.75 / 44.5	.09 / 2.3
228E	1.11 / 28	1.32 / 33.5	.75 / 19.1	1, 2, 3	2.25 / 57.2	.09 / 2.3
230N	1.20 / 30	1.40 / 35.6	.75 / 19.1	1, 2, 3	1.75 / 44.5	.09 / 2.3
230E	1.20 / 30	1.40 / 35.6	.75 / 19.1	1, 2, 3	2.25 / 57.2	.09 / 2.3
232N	1.28 / 32	1.50 / 38.1	.9 / 22.9	1, 2, 3, 4	1.75 / 44.5	.10 / 2.5
232E	1.28 / 32	1.50 / 38.1	.9 / 22.9	1, 2, 3, 4	2.38 / 60.5	.10 / 2.5
234N	1.37 / 34	1.60 / 40.6	.9 / 22.9	1, 2, 3, 4	2.0 / 50.8	.10 / 2.5
234E	1.37 / 34	1.60 / 40.6	.9 / 22.9	1, 2, 3, 4	2.63 / 66.8	.10 / 2.5

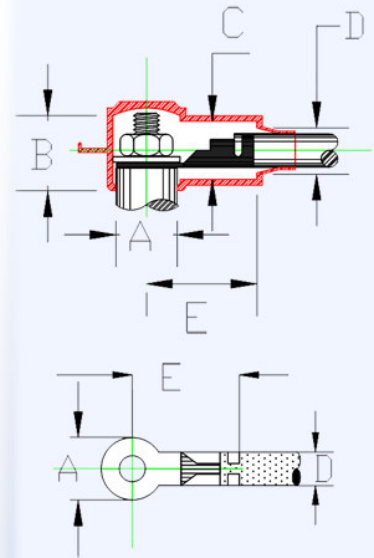


For use with stud-type terminal posts

Finding the correct insulator

1. Determine your terminal's outside diameter (A above)
2. Determine your terminal's post height (B above)
3. Determine your terminal's cable entry (D above)

Match your terminal's measurements against the table above to find the correct insulator for your application.

Call VTE Inc. for more information on finding the correct insulator for your needs.

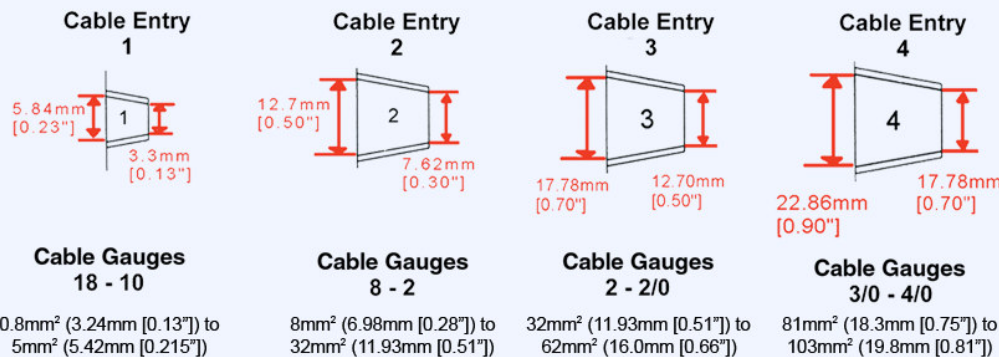

Sample 8 Digit Part Number

