
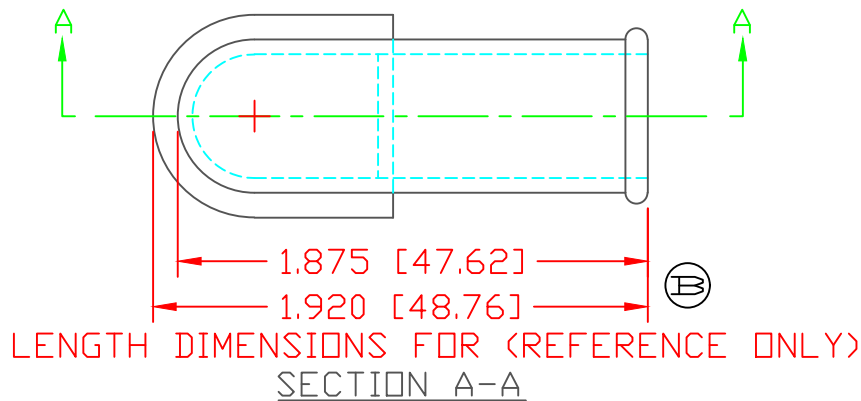



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

| LTR. | REVISIONS | DATE | INT. |
|------|--|---------|------|
| A | TOLERANCE ADDED TO REFLECT PART AS MFG. | 4-03-03 | JC |
| B | REVISED LENGTH DIMS FROM 1.900 AND 2.000 | 9-08-17 | RAS |
| C | REVISED DIM FROM 1.069 | 9-08-17 | RAS |
| D | ADDED ADDITIONAL DIMENSIONS | 9-08-17 | RAS |
| E | REMOVED SPECIAL TOLDRANCE FROM DIMENSION | 9-08-17 | RAS |

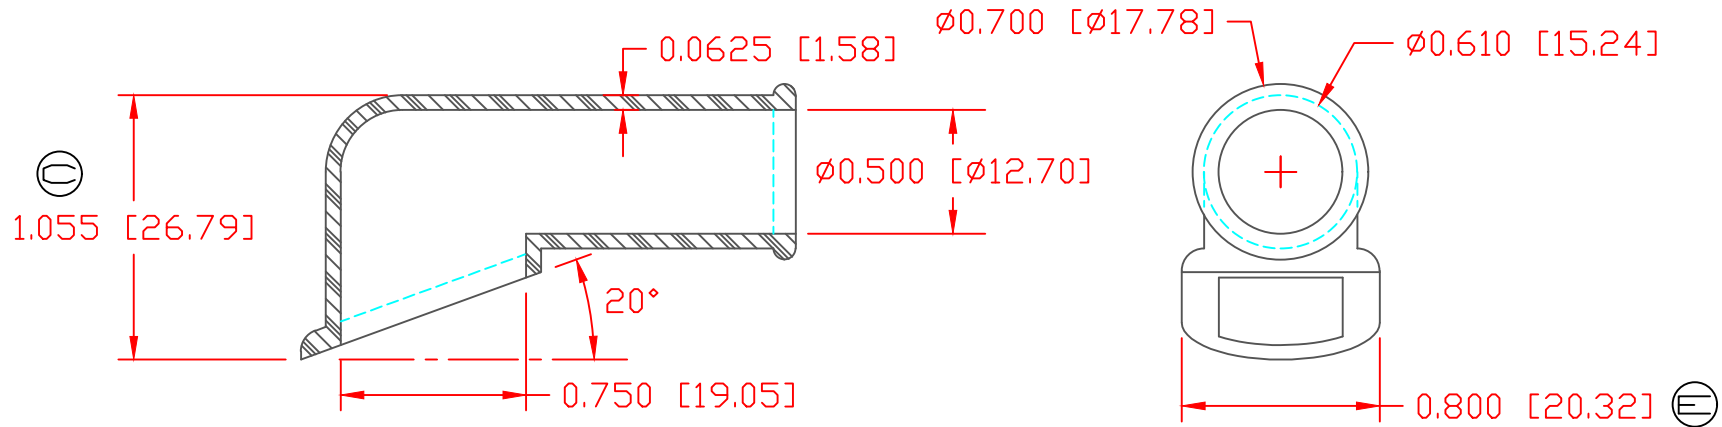

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
ANGLES ±1°
MOLDED PARTS: ±.030" [±0.8mm]

| | |
|-----------------------------|-----------------------|
| MATERIAL PART NO: | 1101650102 |
| MATERIAL: | PVC |
| VENDOR PART NO: | 9812-65-RED 683 |
| SHORE DUREMETER: | "A" 10 SEC. 65 |
| SPECIFIC GRAVITY: | 1.34 |
| ULT. ELONGATION %: | 400 |
| MELTING TEMP: | 315-335 F [157-168 C] |
| BRITTLE TEMP: | -54 F [-48 C] |
| TENSILE STRENGTH PSI: | 1550 PSI |
| DIELECTRIC STRENGTH, V./mil | 511 |
| U.L. RATING: | V2 |

| | | | |
|---|-----------|---|---------------------|
|  | | VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914 | |
| | | REF: | DATE: |
| CUSTOMER DIMS | 4-06-98 | CHK'D BY: PJK | .014 LBS. / 6.49 G. |
| TITLE: TERMINAL INSULATOR BOOT | | | |
| MATERIAL: PVC | PART NO. | | 490N9V02 |
| COLOR: RED | DRG CLASS | REV E | |