


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.

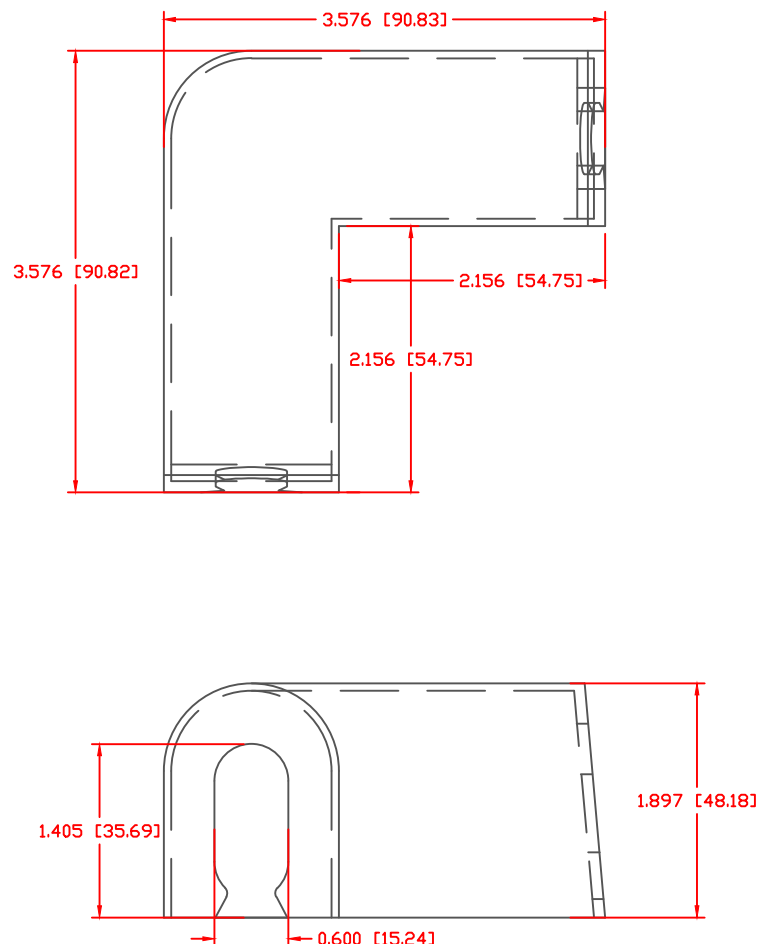

ALL DIMENSIONS GIVEN AS: in [mm]
 MOLDED PARTS: $\pm 0.030"$ [$\pm 0.8\text{mm}$]
 HARDWARE ITEMS: $\pm 0.010"$ [$\pm 0.25\text{mm}$]

VTE PART NO:
 MATERIAL:
 SHORE DUROMETER:
 SPECIFIC GRAVITY:
 ULT. ELONGATION %:
 MELTING TEMP:
 Tensile Strength PSI:

120750315
 POLYPROPYLENE
 75 D
 1.25
 2.5
 324 F [162 C]
 4250

DO NOT SCALE

		VTE Incorporated	
		5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
REF:	DATE:	DRN BY: BRH	WEIGHT:
CUSTOMER DIMS	05-12-06	CHK'D BY: BRH	.089 LBS [40.2 g]
TITLE: 2 CABLE TERMINAL INSULATOR			
MATERIAL: POLYPROPYLENE		PART NO.	
COLOR: RED		375L5P02	
DRG CLASS			