THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE	INT.
A	ADDED TORQUE SPECIFICATION	01-21-14	BRH
B	ADDED SUB-ASSEMBLY NOTE	02-23-15	BRH
C	REMOVED SUB-ASSEMBLY NOTE P/N 73886	02-04-16	RAS
D	REPLACED P/N 3842-002 WITH P/N 3842-005	03-29-16	RAS
E	UPDATED ELECTRICAL VALUES	01-03-17	RAS

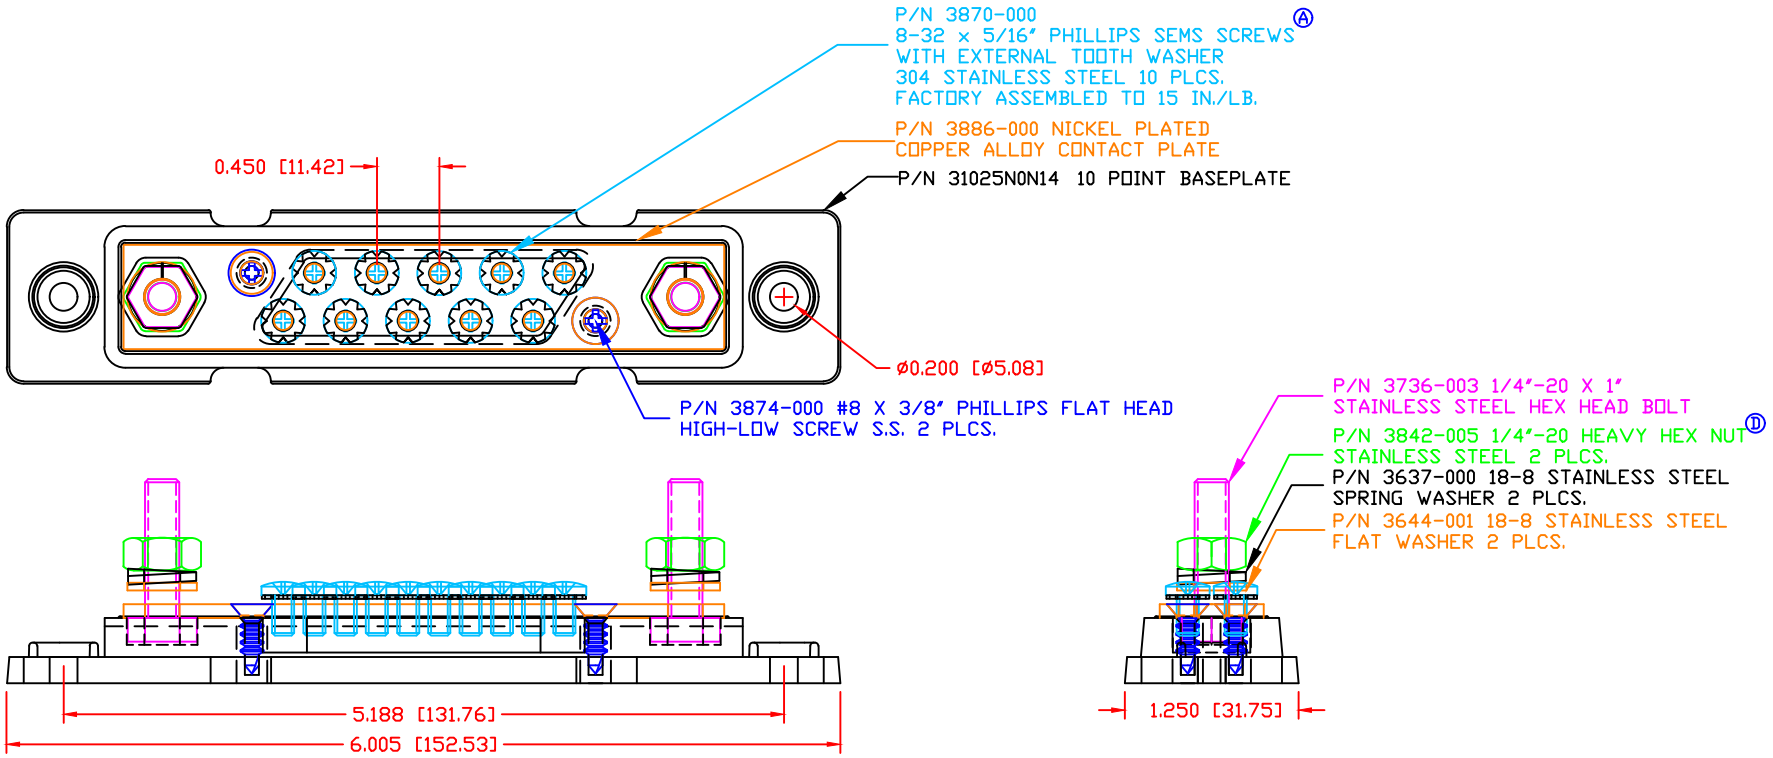

TOLERANCE UNLESS OTHERWISE SPECIFIED:
MOLDED PRODUCTS ONLY: ±.030"/±0.8mm
HARDWARE ITEMS: ±0.010"/±0.25mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

#8 SCREWS FACTORY INSTALLED TO 15 IN-LBS
MAXIMUM RECOMMENDED AMPERAGE: 150 A @12VDC (20A X 10 PLCS)
MAXIMUM RECOMMENDED VOLTAGE: 48VDC
BASE MATERIAL: GLASS-REINFORCED NYLON
BASE MATERIAL U.L. RATING: 94 HB

VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF:	DATE:	DRN BY: BRH	WEIGHT:
CUSTOMER DIMS	09-11-06	CHK'D BY: BRH	
TITLE: 10 POINT BUS STRIP WITH 2-1/4" POSTS			SCALE:
MATERIAL:		PART NO. 771025N0N14	
COLOR:	DRG CLASS REV D		