

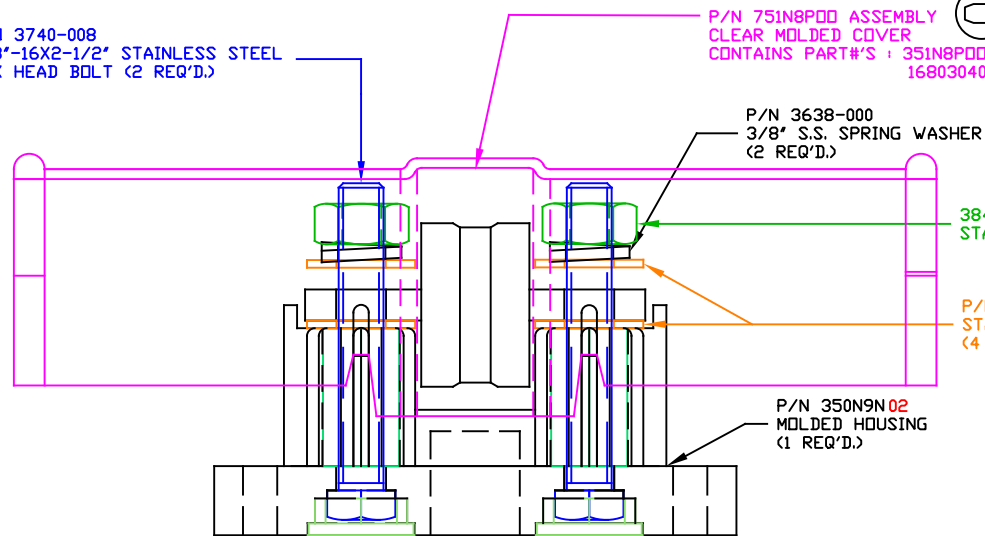


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

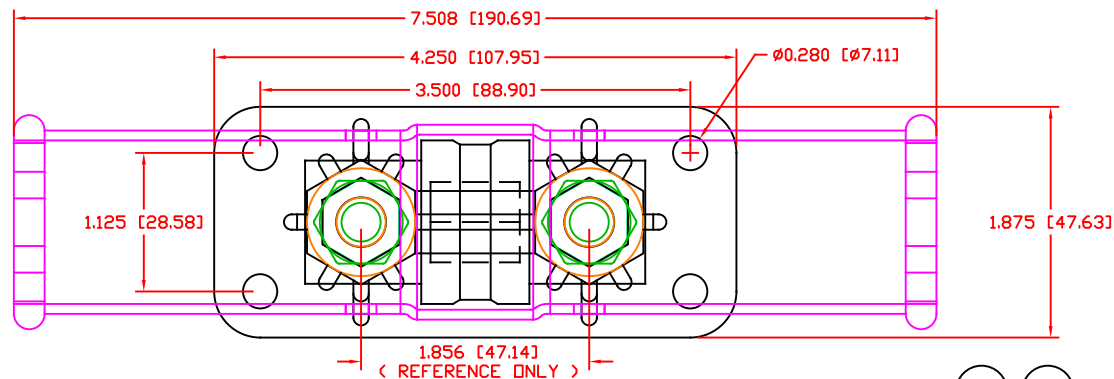

LTR.	REVISIONS	DATE	INT.
A	3740-006 WAS 3740-001	11-15-05	BRH
B	333ND WAS 329ND, REN. 3740-006, 3740-007, ADDED 3740-008 AND 3844-002	3-08-06	BRH
C	351N8P00 WAS 351N8V00	7-30-15	BRH
D	REPLACED P/N 3844-002 WITH P/N 3844-009	3-18-16	RAS
E	PN 333NOV** CHANGED TO 333NON**	3-17-17	RAS
F	UPDATED COVER INFO	3-17-17	RAS
G	ADDED ADDITIONAL INFORMATION FOR PROPER USE	2-16-18	RAS

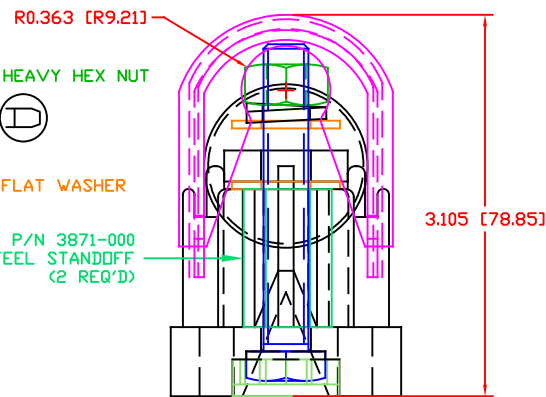

FUSE NOT INCLUDED
SHOWN FOR ILLUSTRATIVE PURPOSES ONLY
MAXIMUM AMPERAGE: 400 AMPS @ 12VDC
MAXIMUM VOLTAGE: 48VDC
MAXIMUM RECOMMENDED FASTENER TORQUE:
STAINLESS HEAVY HEX NUT: 180 IN./LBS. [20.3 Nm]

MATERIAL PART NO: 7111210502
MATERIAL: GLASS FILLED NYLON
VENDOR PART NO: NYLON N2015 HL NAT
SPECIFIC GRAVITY: 1.23
MELTING TEMP: 515 F [268 C]
U.L. RATING: UL 94 HB

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: In [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: $\pm 0.030"$ [$\pm 0.8\text{mm}$]
HARDWARE ITEMS: $\pm 0.010"$ [$\pm 0.25\text{mm}$]



VTE Incorporated

5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF:	DATE: 6-14-05	DRN BY: BRH	WEIGHT:
		CHK'D BY: BRH	
TITLE:	'T' CLASS FUSEHOLDER ASSY.		SCALE:
MATERIAL:	PART NO.		
COLOR:	DRG CLASS REV G	TFB735N8N02	